


Properties

| | |
|-----------------------|---|
| Connection 1 | Loose flange at pressure rating PN16 |
| Construction | straight |
| Sealing form 1 | flat sealing |
| Application | Industry |
| Standard | DIN EN 1092-1 |
| Material | Stainless steel |

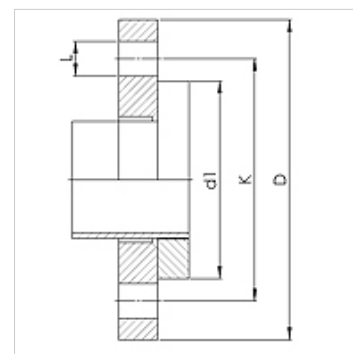

Item

| Identification | DN* | Size | Inches | Ø D (mm) | K (mm) | Ø d2 (mm) | N (mm) |
|----------------------|-----|------|--------|-------------|-----------|--------------|-----------|
| TUE G 25 LF PN16 VA | 25 | 16 | 1" | 115,0 | 85 | 14 | 4 |
| TUE G 32 LF PN16 VA | 32 | 20 | 1.1/4" | 140,0 | 100 | 18 | 4 |
| TUE G 38 LF PN16 VA | 40 | 24 | 1.1/2" | 150,0 | 110 | 18 | 4 |
| TUE G 50 LF PN16 VA | 50 | 32 | 2" | 165,0 | 125 | 18 | 4 |
| TUE G 63 LF PN16 VA | 63 | 40 | 2.1/2" | 185,0 | 145 | 18 | 4 |
| TUE G 75 LF PN16 VA | 75 | 50 | 3" | 200,0 | 160 | 18 | 8 |
| TUE G 102 LF PN16 VA | 100 | 64 | 4" | 220,0 | 180 | 18 | 8 |

N = number of holes

Accessories

| | |
|------------------|---------------------------------------|
| KS AL | Clamp ring fitting, aluminium |
| KS FIX AL | Clamping shell for pinning, aluminium |

Additional elements

| | |
|-----------------|-----------|
| FD C4400 | Flat seal |
|-----------------|-----------|