
TUEG LF PN16 VA

Properties

Connection 1	Loose flange at pressure rating PN16
Construction	straight
Sealing form 1	flat sealing
Application	Industry
Standard	DIN EN 1092-1
Material	Stainless steel



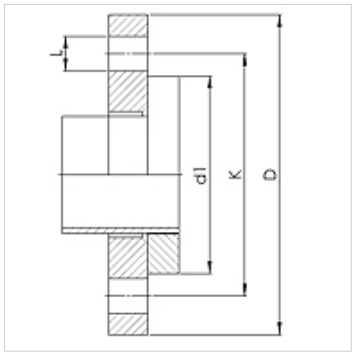

Item

Identification	DN*	Size	Inches	Ø D (mm)	K (mm)	Ø d2 (mm)	N (mm)
TUE G 25 LF PN16 VA	25	16	1"	115,0	85	14	4
TUE G 32 LF PN16 VA	32	20	1.1/4"	140,0	100	18	4
TUE G 38 LF PN16 VA	40	24	1.1/2"	150,0	110	18	4
TUE G 50 LF PN16 VA	50	32	2"	165,0	125	18	4
TUE G 63 LF PN16 VA	63	40	2.1/2"	185,0	145	18	4
TUE G 75 LF PN16 VA	75	50	3"	200,0	160	18	8
TUE G 102 LF PN16 VA	100	64	4"	220,0	180	18	8

N = number of holes

Accessories

KS AL	Clamp ring fitting, aluminium
KS FIX AL	Clamping shell for pinning, aluminium

Additional elements

FD C4400	Flat seal

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.