
NY 100 PA

Properties

Application	medium high pressure circuits High pressure lubrication lines
Special features	high ozone and abrasion resistance good chemical resistance low volumetric expansion
Inner layer	Polyamide (PA)
Insert	one high tensile steel wire braided insert
Outer layer	Polyurethane
Colour	black
Temp. min.	-40 °C
Temp. max.	100 °C
Elongation	+ 2 % to - 4 %
Media	Mineral oil Polyglycol based oil Water (0°C to + 60°C) Water-oil emulsions (up to 60°C)

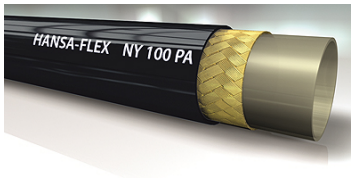

Note

The change in length of the hose is determined at max. working pressure during testing to EN ISO 1402.

Item

Identification	DN*	Size	Inches	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
NY 104 PA	5	3	3/16"	5,0	9,7	360,0	1440	25
NY 106 PA	6	4	1/4"	6,0	11,7	300,0	1200	35
NY 108 PA	8	5	5/16"	8,1	13,2	250,0	1000	40
NY 110 PA	10	6	3/8"	10,0	15,5	225,0	900	60
NY 113 PA	12	8	1/2"	13,0	18,8	180,0	655	70
NY 116 PA	16	10	5/8"	16,3	22,0	140,0	560	115
NY 120 PA	19	12	3/4"	19,4	25,8	115,0	460	145
NY 125 PA	25	16	1"	25,8	33,4	95,0	380	180

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.