


## Properties

Application	resistant to a variety of chemicals
Inner layer	PVDF
Outer layer	PVDF
Colour	Natural
Temp. min.	-40 °C
Temp. max.	150 °C

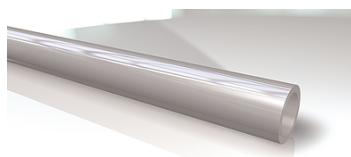

## Additional information

- very good temperature resistance
- extremely high pressure resistance
- sterilisable
- non-combustible (to UL 94 V-O)
- very good UV resistance
- very low gas permeability
- excellent mechanical properties

## Item

Identification	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	Min. bending radius (mm)	Roll length (m)
K-07 10 13 16	2,0	4,0	1,0	60	100
K-07 10 13 17	4,0	6,0	1,0	75	100
K-07 10 13 18	6,0	8,0	1,0	85	100
K-07 10 13 19	8,0	10,0	1,0	100	100
K-07 10 13 20	10,0	12,0	1,0	125	100