
K-DICHTRINGE VULKANFIBER


Sealing rings, fibre, max. temperature 75 °C

HANSA-FLEX

Properties

Temperature	Max. +75 °C
Material	Vulcanised fibre



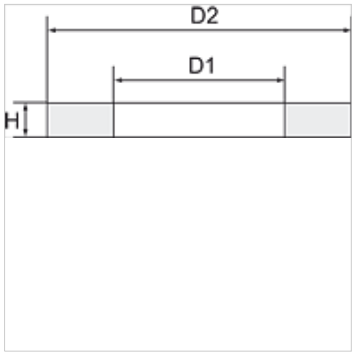

Note

Further information on request

Ordering information

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Item

Identification	for thread	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 02 88	M 5	5,1	8,0	1,0
K- 07 10 02 92	G 1/2	21,0	28,0	2,0
K- 07 10 02 90	G 1/4	13,2	18,0	1,5
K- 07 10 02 91	G 3/8	16,8	22,0	1,5
K- 07 10 02 94	G 1	33,3	38,9	2,0
K- 07 10 02 93	G 3/4	26,5	33,0	2,0
K- 07 10 02 89	G 1/8	10,0	13,0	1,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.