


# K-DICHTRINKE VULKANFIBER

Sealing rings, fibre, max. temperature 75 °C

**HANSA** **FLEX**

## Properties

Temperature	Max. +75 °C
Material	Vulcanised fibre

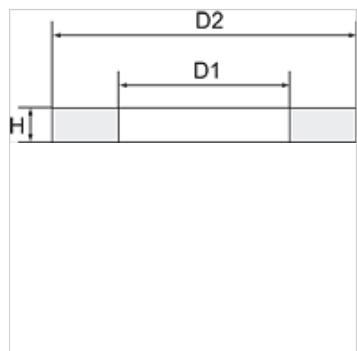

## Note

Further information on request

## Ordering information

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

### Item

Identification	for thread	D1 (mm)	D2 (mm)	H (mm)
K-07 10 02 88	M 5	5,1	8,0	1,0
K-07 10 02 92	G 1/2	21,0	28,0	2,0
K-07 10 02 90	G 1/4	13,2	18,0	1,5
K-07 10 02 91	G 3/8	16,8	22,0	1,5
K-07 10 02 94	G 1	33,3	38,9	2,0
K-07 10 02 93	G 3/4	26,5	33,0	2,0
K-07 10 02 89	G 1/8	10,0	13,0	1,5