

K-DICHTRINGE ALU


Sealing rings, aluminium, max. temperature 250 °C

HANSA FLEX

Properties

Temperature Max. +250 °C

Material Aluminium

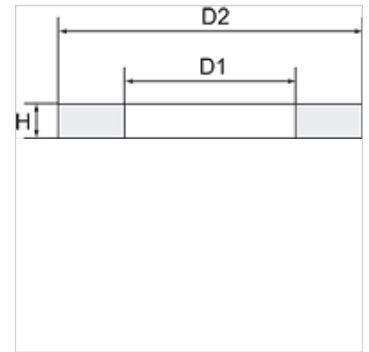

Note

Further information on request

Ordering information

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Item

| Identification | for thread | D1 (mm) | D2 (mm) | H (mm) |
|----------------|------------|------------|------------|-----------|
| K- 07 10 03 02 | M 5 | 5,1 | 8,0 | 1,0 |
| K- 07 10 03 06 | G 1/2 | 21,0 | 28,0 | 1,5 |
| K- 07 10 03 04 | G 1/4 | 13,3 | 18,0 | 1,5 |
| K- 07 10 03 05 | G 3/8 | 17,0 | 21,8 | 1,5 |
| K- 07 10 03 08 | G 1 | 33,3 | 38,9 | 2,0 |
| K- 07 10 03 07 | G 3/4 | 26,5 | 33,0 | 2,0 |
| K- 07 10 03 03 | G 1/8 | 10,0 | 13,8 | 1,5 |