K-ELEKTRO-KABELAUFROLL POM


Electrical cable reels (POM) easy mounting on the wall or ceiling

HANSA FLEX

Properties

Cable	PVC 3 x 1.5 mm2
Current	Max. 16 A
Connection	SchuKo plug
Power input	Max. 1000 W (fully wound), max. 3500 W (fully unwound)



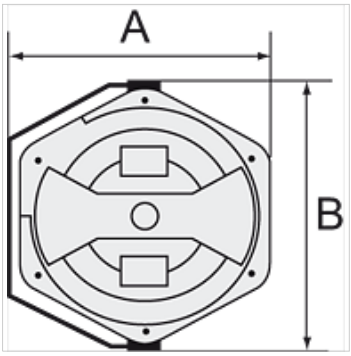

Note

Further information on request

Description

Closed, rugged, impact-resistant housing made of POM. Includes a thermal circuit breaker. In case of overloading, a thermal overload protective circuit cuts off the electrical power supply automatically.

Item

Identification	A (mm)	B (mm)	Length (m)	Voltage
K- 07 10 03 46	394,5	436,0	10	max. 230V
K- 07 10 03 47	394,5	436,0	17	max. 230V

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.