


# K-SCHL-AUFROLLER LU WA L

Hose reels for compressed air and water, lightweight type

**HANSA FLEX**

## Properties

<b>Hose material</b>	PVC
<b>Operating pressure</b>	max. 12 bar (K-07100622); max. 20 bar (K-07100623)
<b>Operating temperature</b>	max. +60 °C
<b>Inlet nozzle</b>	G 1/4
<b>Swivel angle</b>	180°

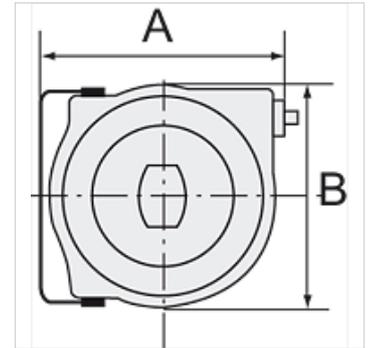

## Note

Further information on request

## Description

High-quality, impact-resistant polypropylene housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or stop function. Reel guide prevents excessive wear on the hose.

## Item

Identification	Hose size	A (mm)	B (mm)	Hose length (m)
K- 07 10 06 22	12 mm x 8 mm	340,0	311,0	8
K- 07 10 06 23	12 mm x 6 mm	445,0	400,0	15