



# K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

**HANSA FLEX**

## Properties

<b>Application</b>	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
<b>Special features</b>	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

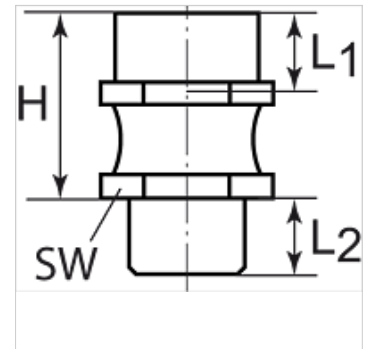

## Note

Further information on request

## Description

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

## Item

Identification	Thread 1 female	Thread 2 male	H (mm)	Material	L1 (mm)	L2 (mm)	elbow W (°)	vertical load (N/m2)	bending moment (N/m2)	AF (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17