

K-VAKUUMSENSOR ANALOG

Vacuum sensor, analogue

HANSA FLEX

Properties

Application Measurement of vacuum values close to the suction pad
Remote evaluation of the signals
Processing the output signals, for example, by PLC

Media dry, oil-free air and non-aggressive gases


Temp. range 0 - 50 °C

Output signal 1 to 5 analogous to V

Hysteresis Fixed: 20 mbar (model with digital sensor)

Cable length 3 m

Protection IP IP 40

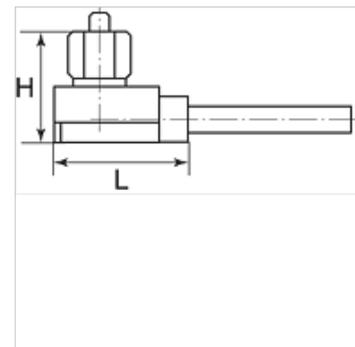

Note

Further information on request

Description

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Item

Identification	Connection	H (mm)	L (mm)	Measuring range	Voltage
K- 07 45 01 56	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC