
K-VAKUUMSENSOR ANALOG

Vacuum sensor, analogue

Properties

Application	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Media	dry, oil-free air and non-aggressive gases
Temp. range	0 - 50 °C
Output signal	1 to 5 analogous to V
Hysteresis	Fixed: 20 mbar (model with digital sensor)
Cable lenght	3 m
Protection IP	IP 40



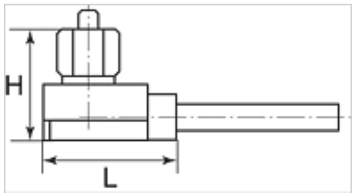

Note

Further information on request

Description

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Item

Identification	Connection	H (mm)	L (mm)	Measuring range	Voltage
K- 07 45 01 56	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.