


K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

HANSA**FLEX**

Properties

Application	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Media	dry, oil-free air and non-aggressive gases
Temp. range	0 - 50 °C
Output signal	1 to 5 analogous to V
Hysteresis	Fixed: 20 mbar (model with digital sensor)
Cable lenght	3 m
Protection IP	IP 40

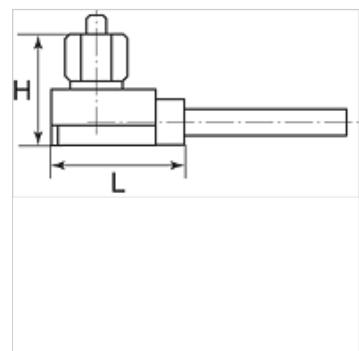

Note

Further information on request

Description

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Item	Identification	Connection	H (mm)	L (mm)	Measuring range	Voltage
K- 07 45 01 57		M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC