


# K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital



Properties	
Application	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Media	dry, oil-free air and non-aggressive gases
Temp. range	0 - 50 °C
Output signal	1 to 5 analogous to V
Hysteresis	Fixed: 20 mbar (model with digital sensor)
Cable lenght	3 m
Protection IP	IP 40

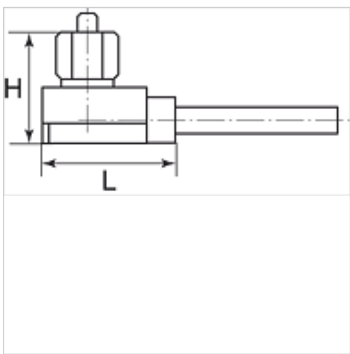

## Note

Further information on request

## Description

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Item					
Identification	Connection	H (mm)	L (mm)	Measuring range	Voltage
K- 07 45 01 57	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC