# K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

## Properties

| | |
|---|---|
| **Application** | Measurement of vacuum values close to the suction pad<br>Remote evaluation of the signals<br>Processing the output signals, for example, by PLC |
| **Media** | dry, oil-free air and non-aggressive gases |
| **Temp. range** | 0 - 50 °C |
| **Output signal** | 1 to 5 analogous to V |
| **Hysteresis** | Fixed: 20 mbar (model with digital sensor) |
| **Cable lenght** | 3 m |
| **Protection IP** | IP 40 |



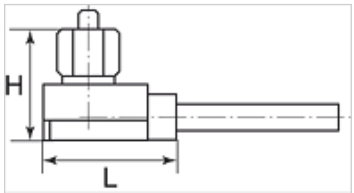


## Note

Further information on request

## Description

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

## Item

| Identification | Connection | H (mm) | L (mm) | Measuring range | Voltage |
|---|---|---|---|---|---|
| **K- 07 45 01 57** | M 5 male | 16,9 | 21,0 | -1 bis 0 bar | 10 - 24 V DC |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*