# K-ABSPV AG


Globe valves

HANSA-FLEX

## Properties

| | |
|---|---|
| **Operating pressure** | Max. 40 bar |
| **Thread description** | With inside cone for ball-type hose fitting |
| **Housing** | Brass |
| **Handwheel** | Plastic |
| **Spindle** | With stainless steel ball |



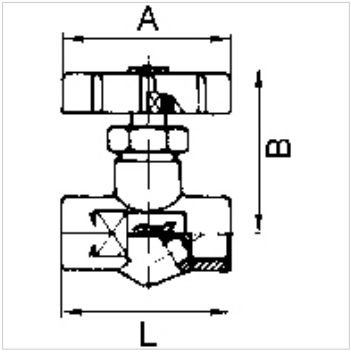


## Note

Further information on request

## Item

| Identification | DN | Thread | A (mm) | B (mm) | L (mm) | AF (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 03 52** | 6 | G 1/4 | 48,0 | 50,0 | 42,0 | 17 |
| **K- 07 30 03 53** | 8 | G 3/8 | 48,0 | 55,0 | 52,0 | 22 |
| **K- 07 30 03 54** | 11 | G 1/2 | 48,0 | 65,0 | 67,0 | 27 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*