


# K-ABSPV AG

Globe valves

**HANSA FLEX**

## Properties

|                    |   |
|--------------------|---|
| Operating pressure | Max. 40 bar                                 |
| Thread description | With inside cone for ball-type hose fitting |
| Housing            | Brass                                       |
| Handwheel          | Plastic                                     |
| Spindle            | With stainless steel ball                   |

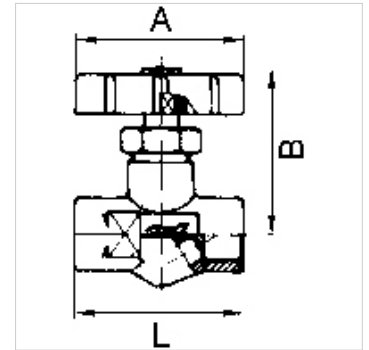

## Note

Further information on request

## Item

| Identification | DN | Thread | A<br>(mm) | B<br>(mm) | L<br>(mm) | AF<br>(mm) |
|----------------|----|--------|-----------|-----------|-----------|------------|
| K- 07 30 03 52 | 6  | G 1/4  | 48,0      | 50,0      | 42,0      | 17         |
| K- 07 30 03 53 | 8  | G 3/8  | 48,0      | 55,0      | 52,0      | 22         |
| K- 07 30 03 54 | 11 | G 1/2  | 48,0      | 65,0      | 67,0      | 27         |