K-DRV

Unidirectional flow control valves

Properties

Operating pressure	Max. 10 bar
Operating temperature	max. +70 °C
Sealant	NBR
Housing	Alu eloxed
Internal parts	Brass

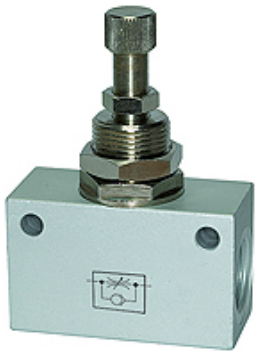

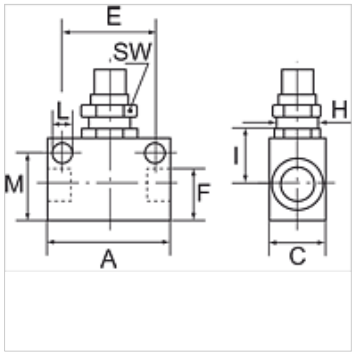

Note

Further information on request

Description

These valves are restricted in the flow direction and have free passage in the opposite direction.

Item

Identification	Thread	A (mm)	C (mm)	E (mm)	H size	I (mm)	L (mm)	M (mm)	AF (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.