
K-DV 1

Bidirectional flow control valves

Properties

Operating pressure	Max. 10 bar
Operating temperature	max. +70 °C
Internal parts	Brass
Sealant	NBR
Housing	Alu eloxed



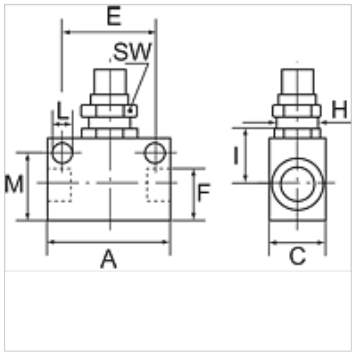

Note

Further information on request

Description

Straight-way valves with restricted flow in both directions.

Item

Identification	Thread	A (mm)	C (mm)	E (mm)	H size	I (mm)	L (mm)	M (mm)	AF (mm)
K- 07 30 12 43	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 44	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 45	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 46	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.