
K-DRS ELK GERAETESTECKER

Pressure switches, connection with plug connector, type A acc. to DIN 43650

Properties

Application	Pneumatic applications
Switching frequency	200/min.
Switching voltage	max. 250 V AC / 28 V DC
Protection IP	IP 65 (DIN 43650), IP 67 (M 12 x 1)
Temp. range	-10 °C to +80 °C
Setting cap	Aluminium, powder-coated
Housing	Special die-cast material
Diaphragm, seal	NBR



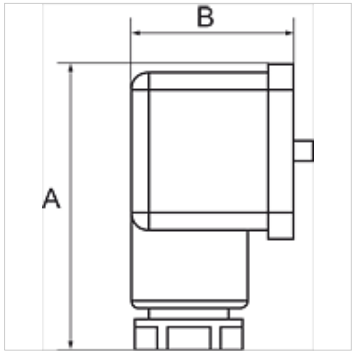

Note

Further information on request

Description

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Item

Identification	Connection	Adjustment range	A (mm)	B (mm)
K- 07 30 28 45	G 1/4	0,2 - 2,0 bar	48,0	28,0
K- 07 30 28 46	G 1/4	0,5 - 8,0 bar	48,0	28,0
K- 07 30 28 47	G 1/4	1,0 - 16,0 bar	48,0	28,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.