


# K-DRS ELK GERAETESTECKER VAKUUM

Pressure switches, connection with plug connector, type A acc. to DIN 43650

**HANSA***FLEX*

## Properties

|                     |                                     |
|---------------------|-------------------------------------|
| Application         | Pneumatic applications              |
| Switching frequency | 200/min.                            |
| Switching voltage   | max. 250 V AC / 28 V DC             |
| Adjustment range    | -0.85 / +1 bar                      |
| Protection IP       | IP 65 (DIN 43650), IP 67 (M 12 x 1) |
| Temp. range         | -10 °C to +80 °C                    |
| Setting cap         | Aluminium, powder-coated            |
| Housing             | Special die-cast material           |
| Diaphragm, seal     | Perbunan                            |

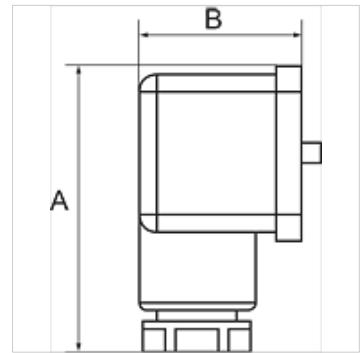

## Note

Further information on request

## Description

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

## Item

| Identification | Connection | A<br>(mm) | B<br>(mm) |
|----------------|------------|-----------|-----------|
| K-07 30 28 51  | Flange     | 48,0      | 28,0      |
| K-07 30 28 53  | G 1/4      | 48,0      | 28,0      |