


K-BKR FEINEINSTELLUNG

Ball valves



Properties	
Operating pressure	Max. 40 bar
Operating temperature	-15 °C to +100 °C
Thread description	G thread acc. DIN EN ISO 228-1
Housing	Nickel-plated brass (outside); Brass with a bare metal surface (inside)
Handwheel	Plastic
Ball	Chrome-plated brass
Ball seals	PTFE
Stem seal	NBR

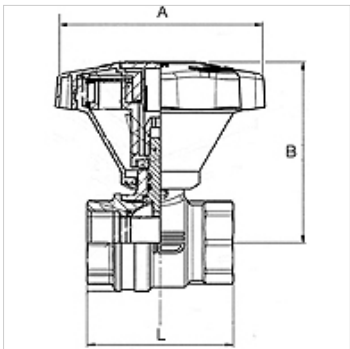

Note

Further information on request

Description

Brass ball valves in the standard series with fine adjustment. Unlike our classic standard ball valves (open-close function), this model features a special stem technology that allows finely modulated opening and closing of the line. The flow rate can be regulated extremely precisely as a result. The cock is made of low-lead brass with a bare brass surface on the inside. It is thus safe to use with drinking water. This valve complies with the European standard EN 13828 and the working paper DVGW W 570.

Item					
Identification	DN	Thread	A (mm)	B (mm)	L (mm)
K- 07 30 00 41	10	G 3/8	83,0	63,0	43,4
K- 07 30 00 42	15	G 1/2	83,0	70,0	50,1
K- 07 30 00 43	20	G 3/4	83,0	76,0	58,0
K- 07 30 00 44	25	G 1	83,0	80,0	68,8
K- 07 30 00 45	32	G 1 1/4	130,0	110,0	81,0
K- 07 30 00 46	40	G 1 1/2	130,0	116,0	93,2
K- 07 30 00 47	50	G 2	130,0	123,0	110,2