



# K-BKR MINI DREGRIF 1

Mini ball valves

**HANSA FLEX**

## Properties

Operating pressure	Max. 10 bar
Media temperature	-10 °C to +80 °C
Turning handle	Plastic
Housing and ball	Nickel-plated brass
Ball seals	PTFE
Stem seal	NBR

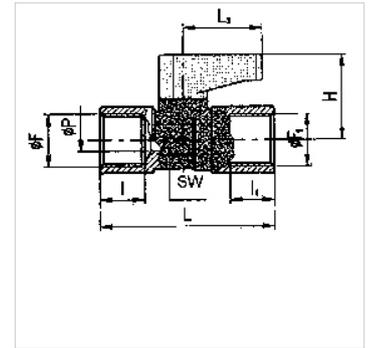

## Note

Further information on request

## Item

Identification	DN	Thread	H (mm)	L (mm)	L1 (mm)	AF (mm)
K- 07 30 20 48	6	Rp 1/8 female	21,5	36,5	19,0	14
K- 07 30 20 49	6	Rp 1/4 female	21,5	43,0	19,0	14
K- 07 30 29 76	7	Rp 3/8 female	22,5	48,0	18,0	18
K- 07 30 29 77	10	Rp 1/2 female	32,0	59,0	25,0	22
K- 07 30 20 30	6	R/Rp 1/8 male / 1/8 female	21,5	35,5	19,0	14
K- 07 30 20 31	6	R/Rp 1/4 male / 1/8 female	21,5	38,0	19,0	14
K- 07 30 20 32	6	R/Rp 1/4 male / 1/4 female	21,5	40,5	19,0	14
K- 07 30 20 33	6	R/Rp 3/8 male / 1/4 female	21,5	41,5	19,0	14
K- 07 30 29 78	8	R/Rp 3/8 male / 3/8 female	22,5	44,5	19,5	18
K- 07 30 29 79	10	R/Rp 1/2 male / 1/2 female	32,5	55,5	26,5	22