
# K-BKR MINI DREGRIFF 1


Mini ball valves

HANSA-FLEX

## Properties

| | |
|---|---|
| **Operating pressure** | Max. 10 bar |
| **Media temperature** | -10 °C to +80 °C |
| **Turning handle** | Plastic |
| **Housing and ball** | Nickel-plated brass |
| **Ball seals** | PTFE |
| **Stem seal** | NBR |



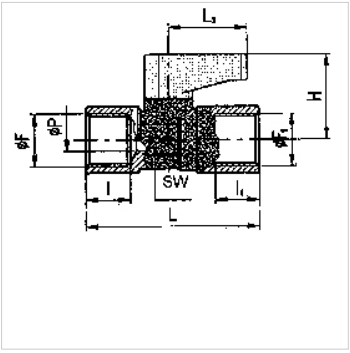


## Note

Further information on request

## Item

| Identification | DN | Thread | H (mm) | L (mm) | L1 (mm) | AF (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 20 48** | 6 | Rp 1/8 female | 21,5 | 36,5 | 19,0 | 14 |
| **K- 07 30 20 49** | 6 | Rp 1/4 female | 21,5 | 43,0 | 19,0 | 14 |
| **K- 07 30 29 76** | 7 | Rp 3/8 female | 22,5 | 48,0 | 18,0 | 18 |
| **K- 07 30 29 77** | 10 | Rp 1/2 female | 32,0 | 59,0 | 25,0 | 22 |
| **K- 07 30 20 30** | 6 | R/Rp 1/8 male / 1/8 female | 21,5 | 35,5 | 19,0 | 14 |
| **K- 07 30 20 31** | 6 | R/Rp 1/4 male / 1/8 female | 21,5 | 38,0 | 19,0 | 14 |
| **K- 07 30 20 32** | 6 | R/Rp 1/4 male / 1/4 female | 21,5 | 40,5 | 19,0 | 14 |
| **K- 07 30 20 33** | 6 | R/Rp 3/8 male / 1/4 female | 21,5 | 41,5 | 19,0 | 14 |
| **K- 07 30 29 78** | 8 | R/Rp 3/8 male / 3/8 female | 22,5 | 44,5 | 19,5 | 18 |
| **K- 07 30 29 79** | 10 | R/Rp 1/2 male / 1/2 female | 32,5 | 55,5 | 26,5 | 22 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*