


# K-BKR MINI GLATTE OBERFLAECHE

Mini ball valves

**HANSA FLEX**

## Properties

<b>Application</b>	Compressed air, water, oils, non-toxic gases
<b>Operating pressure</b>	Max. 10 bar
<b>Media temperature</b>	-10 °C to +80 °C
<b>Housing and ball</b>	Nickel-plated brass
<b>Hand lever, turning handle</b>	Plastic
<b>Ball seals</b>	PTFE
<b>Stem seal</b>	NBR

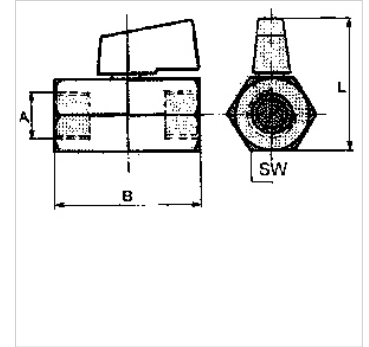

## Note

Further information on request

## Item

Identification	Thread	B (mm)	L (mm)	AF (mm)
K- 07 30 20 86	G 1/8 female	39,0	38,0	20
K- 07 30 20 87	G 1/4 female	39,0	38,0	20
K- 07 30 20 88	G 3/8 female	42,0	38,0	20
K- 07 30 20 89	G 1/2 female	47,0	38,0	24
K- 07 30 20 82	G 1/8 female/male	39,0	38,0	20
K- 07 30 20 83	G 1/4 female/male	39,0	38,0	20
K- 07 30 20 84	G 3/8 female / male	40,0	38,0	20
K- 07 30 20 85	G 1/2 female/male	45,0	38,0	24