
K-BKR MINI DREHGRIFF

Mini ball valves with wing lever

Properties

Application	Compressed air, water, oils, non-toxic gases
Operating pressure	Max. 10 bar
Media temperature	-10 °C to +90 °C
Housing and ball	Nickel-plated brass
Hand lever, turning handle	Plastic
Ball seals	PTFE
Stem seal	FKM



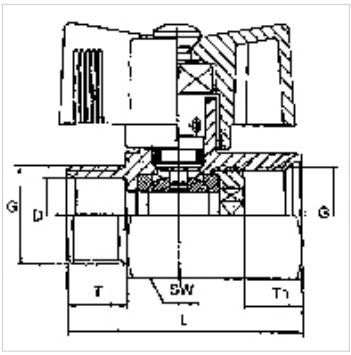

Note

Further information on request

Item

Identification	DN	Thread	L (mm)	AF (mm)	T (mm)	T1 (mm)
K- 07 30 20 50	8	G 1/4 female	41,5	21	9,0	10,5
K- 07 30 20 51	8	G 3/8 female	41,5	21	12,0	10,0
K- 07 30 20 52	10	G 1/2 female	47,0	24	12,5	10,5
K- 07 30 20 34	8	G 1/4 female/male	41,5	21	9,0	10,5
K- 07 30 20 35	8	G 3/8 female / male	40,5	21	10,0	10,0
K- 07 30 20 36	10	G 1/2 female/male	46,0	25	12,0	10,6

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.