


### Properties

<b>Design</b>	Pneumatic actuators, in double- or single acting version, with integrated end-position feedback
<b>Operating pressure</b>	DN 15 - DN 50: max. 40 bar; DN 65 - DN 100: max. 16 bar
<b>Operating temperature</b>	-20 °C to +70 °C
<b>Angle of rotation</b>	90 °
<b>Pilot pressure</b>	5.5 bar
<b>Valve adapter</b>	Acc. to NAMUR
<b>Drive</b>	aluminium eloxed
<b>Drive seal</b>	NBR
<b>Ball valve</b>	Stainless steel 1.4408, with ISO-flange plate
<b>Ball valve seal</b>	PTFE

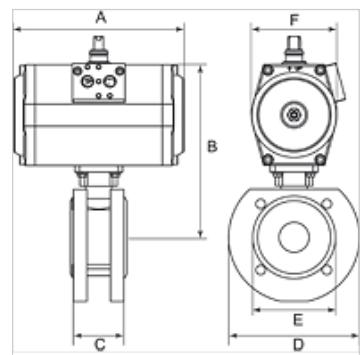

### Note

Further information on request

### Description

2-way ball valves compact flange type, full bore

### Item

Identification	DN	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
K-07 30 02 76	15	116,0	125,0	40,0	95,0	45,0	61,5
K-07 30 02 77	20	116,0	129,3	44,0	105,0	58,0	61,5
K-07 30 02 78	25	133,0	138,6	53,0	115,0	68,0	68,5
K-07 30 02 79	32	137,0	158,2	58,4	135,0	78,0	80,0
K-07 30 02 80	40	161,0	176,3	62,0	145,0	88,0	92,5
K-07 30 02 81	50	161,0	185,5	78,0	155,0	102,0	92,5
K-07 30 02 82	65	180,0	205,0	100,0	185,0	122,0	92,5
K-07 30 02 83	80	209,0	240,0	120,0	200,0	138,0	110,5
K-07 30 02 75	100	221,0	272,0	152,0	220,0	158,0	120,0