# K-BKR STELLANTR E MS


Brass ball valves, single-acting actuator - spring to open

HANSA-FLEX

## Properties

| | |
|---|---|
| **Design** | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| **Operating pressure** | max. 40 bar (to DN 32); max. 25 bar (from DN 40); max. 16 bar (from DN 65) |
| **Operating temperature** | -20 °C to +70 °C |
| **Angle of rotation** | 90 ° |
| **Pilot pressure** | 5.5 bar |
| **Valve adapter** | Supplied as standard |
| **Drive** | aluminium eloxed |
| **Drive seal** | NBR |
| **Ball valve** | Chrome-plated brass, with ISO-flange plate |
| **Ball valve seal** | PTFE/FKM |
| **Piloting** | |



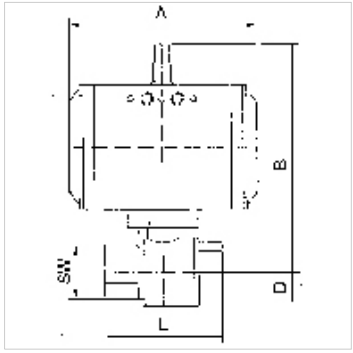


## Note

Further information on request

## Description

2-way cock, full bore

## Item

| Identification | DN | Thread | A (mm) | B (mm) | D (mm) | L (mm) | AF (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 30 02 18** | 15 | Rp 1/2 | 133,0 | 142,0 | 17,0 | 75,0 | 26 |
| **K- 07 30 02 19** | 15 | Rp 1/2 | 116,0 | 133,0 | 17,0 | 75,0 | 26 |
| **K- 07 30 02 20** | 20 | Rp 3/4 | 133,0 | 145,0 | 20,0 | 80,0 | 32 |
| **K- 07 30 02 21** | 25 | Rp 1 | 133,0 | 148,0 | 25,0 | 90,0 | 41 |
| **K- 07 30 02 22** | 32 | Rp 1 1/4 | 137,0 | 173,0 | 30,0 | 110,0 | 50 |
| **K- 07 30 02 23** | 40 | Rp 1 1/2 | 137,0 | 180,0 | 36,0 | 120,0 | 55 |
| **K- 07 30 02 24** | 50 | Rp 2 | 180,0 | 203,0 | 45,0 | 140,0 | 70 |
| **K- 07 30 02 25** | 65 | Rp 2 1/2 | 209,0 | 230,0 | 57,0 | 155,0 | 83 |
| **K- 07 30 02 26** | 80 | Rp 3 | 209,0 | 242,0 | 68,0 | 182,0 | 98 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*