


K-3 BKR STELLANTR E T MS

Brass ball valves, 3-way, with double-acting actuator, T-bore, normal position

HANSA FLEX

Properties

| | |
|------------------------------|---|
| Design | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| Bore | T shaped |
| Operating temperature | -20 °C to +70 °C |
| Angle of rotation | 90 ° |
| Pilot pressure | 5.5 bar |
| Valve adapter | Supplied as standard |
| Drive | aluminium eloxed |
| Drive seal | NBR |
| Ball valve | Chrome-plated brass, with ISO-flange plate |
| Ball valve seal | PTFE/FKM |

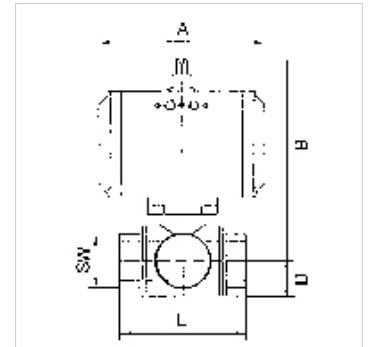

Note

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Further information on request

Description

3-way cock, T-bore, full bore

Additional information

Other T-positions on request

| Item | | | | | | | | | |
|----------------|----|----------|----------|----------|--------|--------|--------|--------|---------|
| Identification | DN | Thread | Position | PN (bar) | A (mm) | B (mm) | D (mm) | L (mm) | AF (mm) |
| K- 07 30 03 17 | 15 | Rp 1/2 | T 3 | 40 | 133,0 | 142,0 | 20,0 | 64,5 | 25 |
| K- 07 30 03 18 | 20 | Rp 3/4 | T 3 | 40 | 133,0 | 146,0 | 24,0 | 76,0 | 31 |
| K- 07 30 03 19 | 25 | Rp 1 | T 3 | 40 | 133,0 | 150,5 | 30,0 | 97,0 | 41 |
| K- 07 30 03 20 | 32 | Rp 1 1/4 | T 3 | 40 | 161,0 | 191,5 | 37,0 | 118,0 | 55 |
| K- 07 30 03 21 | 40 | Rp 1 1/2 | T 3 | 25 | 180,0 | 193,5 | 43,0 | 133,0 | 55 |
| K- 07 30 03 22 | 50 | Rp 2 | T 3 | 25 | 209,0 | 221,0 | 56,0 | 157,0 | 67 |