



K-MV G 230 V, 50 - 60 HZ D

Normally closed, 230 V, 50 to 60 Hz, directly operated

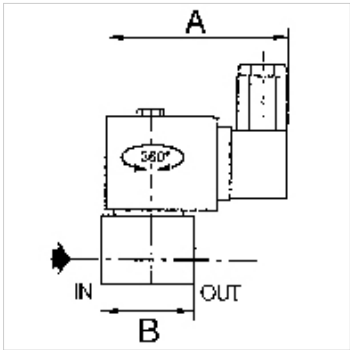

Properties	
Electrical connection	For Pg 11P connector socket, acc. to DIN 4400
Protection IP	IP65 (with connector socket fitted)
Media temperature	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Housing, valve seat	Stainless steel
Internal parts	Stainless steel
Seal	Perbunan (NBR) or FKM



Note
Further information on request

Description
Available versions, Directly operated, Combined operation

Item							
Identification	Thread	Max. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
K- 07 30 22 46	G 1/8	20	2,4	NBR	80,0	30,0	1
K- 07 30 22 48	G 1/8	20	2,4	FKM	80,0	30,0	1
K- 07 30 22 47	G 1/4	12	4,0	NBR	85,0	45,0	1
K- 07 30 22 49	G 1/4	12	4,0	FKM	85,0	45,0	1