


# K-MV G 230 V, 50 - 60 Hz D

Normally closed, 230 V, 50 to 60 Hz, directly operated

**HANSA****FLEX**

## Properties

Electrical connection	For Pg 11P connector socket, acc. to DIN 4400
Protection IP	IP65 (with connector socket fitted)
Media temperature	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Housing, valve seat	Stainless steel
Internal parts	Stainless steel
Seal	Perbunan (NBR) or FKM

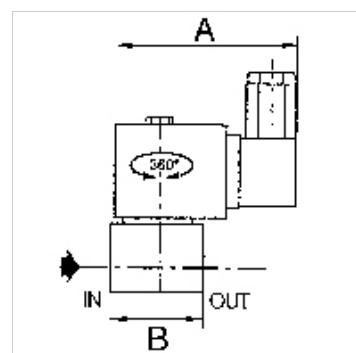

## Note

Further information on request

## Description

Available versions, Directly operated, Combined operation

Item	Identification	Thread	Max. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
	K-07 30 22 46	G 1/8	20	2,4	NBR	80,0	30,0	1
	K-07 30 22 48	G 1/8	20	2,4	FKM	80,0	30,0	1
	K-07 30 22 47	G 1/4	12	4,0	NBR	85,0	45,0	1
	K-07 30 22 49	G 1/4	12	4,0	FKM	85,0	45,0	1