



K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Properties

Electrical connection	For Pg 11P connector socket, acc. to ISO 4400
Protection IP	IP65 (with connector socket fitted)
Thread description	Rp thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR)

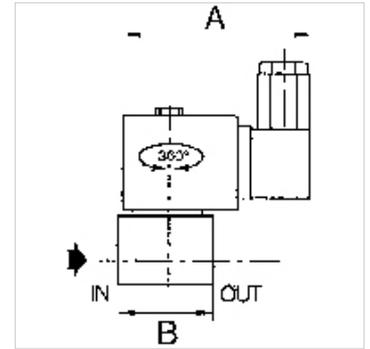

Note

Further information on request

Description

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item

Identification	Thread	Max. working pressure (bar)	DN	A (mm)	B (mm)	Type
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10