



K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

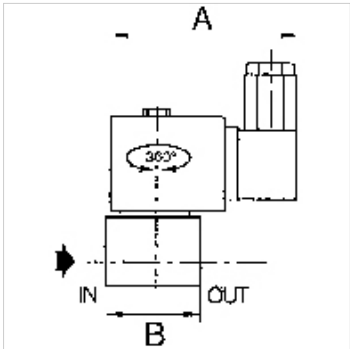

Properties	
Electrical connection	For Pg 11P connector socket, acc. to ISO 4400
Protection IP	IP65 (with connector socket fitted)
Thread description	Rp thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR)



Note
Further information on request

Description
For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item						
Identification	Thread	Max. working pressure (bar)	DN	A (mm)	B (mm)	Type
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10