

K-MV 3/2 24V DC

3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

Properties

Electrical connection	For Pg 11P connector socket, acc. to ISO 4400
Protection IP	IP65 (with connector socket fitted)
Thread description	Rp thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR)



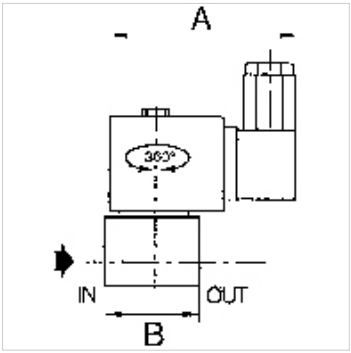

Note

Further information on request

Description

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item

Identification	Thread	Max. working pressure (bar)	DN	A (mm)	B (mm)	Type
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.