
# K-MV 3/2 BANJO

Solenoid valves

## Properties

| | |
|---|---|
| **Media temperature** | max. +60 °C |
| **Connection** | Port 1: Plug connection for hose outside Ø 4 mm; Port 2: G 1/8 thread; Relief port 3: M 5 thread |
| **electric variant** | acc. france norm NF C79300 |
| **Operating pressure** | Max. 10 bar |
| **Operating temperature** | max. +60 °C |
| **Housing** | Polyamide (glass fibre-reinforced) |
| **Seal** | Perbunan (NBR) |

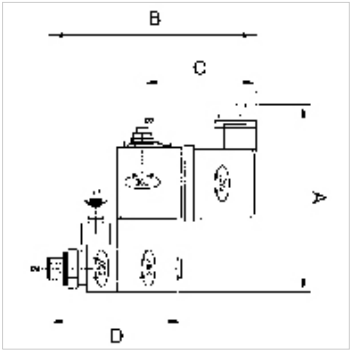


## Note

Further information on request

## Description

Compact solenoid valves for mounting directly on the actuator (single-acting cylinder, valve, etc.). Optimum installation Supply port (1), solenoid valve body, coil and cable socket can be rotated 360°, Manual operator, Exhaust air restrictor available on

## Item

| Identification | Thread | C (mm) | D (mm) | Voltage | A (mm) | B (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 22 34** | G 1/8 male | 49,0 | 58,0 | 230/50 V | 79,0 | 90,0 |
| **K- 07 30 23 07** | G 1/8 male | 49,0 | 58,0 | 24 V DC | 79,0 | 90,0 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*