


# K-MV 3/2 BANJO

## Solenoid valves

### Properties

|                              |  |
|------------------------------|--|
| <b>Media temperature</b>     | max. +60 °C  |
| <b>Connection</b>            | Port 1: Plug connection for hose outside Ø 4 mm; Port 2: G 1/8 thread; Relief port 3: M 5 thread |
| <b>electric variant</b>      | acc. france norm NF C79300   |
| <b>Operating pressure</b>    | Max. 10 bar  |
| <b>Operating temperature</b> | max. +60 °C  |
| <b>Housing</b>               | Polyamide (glass fibre-reinforced)   |
| <b>Seal</b>                  | Perbunan (NBR)   |

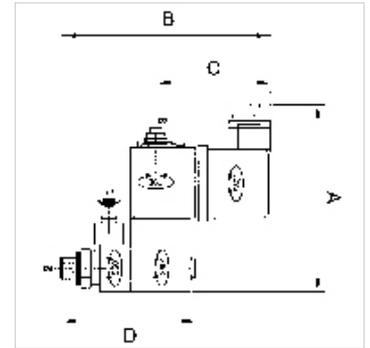

### Note

Further information on request

### Description

Compact solenoid valves for mounting directly on the actuator (single-acting cylinder, valve, etc.). Optimum installation Supply port (1), solenoid valve body, coil and cable socket can be rotated 360°, Manual operator, Exhaust air restrictor available on

### Item

| Identification | Thread     | C (mm) | D (mm) | Voltage  | A (mm) | B (mm) |
|----------------|------------|--------|--------|----------|--------|--------|
| K- 07 30 22 34 | G 1/8 male | 49,0   | 58,0   | 230/50 V | 79,0   | 90,0   |
| K- 07 30 23 07 | G 1/8 male | 49,0   | 58,0   | 24 V DC  | 79,0   | 90,0   |