


K-MV 3/2 ELK

Solenoid valves

HANSA FLEX

Properties

Protection IP	IP65 (with connector socket fitted)
Media temperature	-10 °C to +100 °C
Vent port	M 5
Application	Compressed air and neutral, non-toxic gases, not suitable for liquids
Operating pressure	min. 0,0 bar; max. 15,0 bar
Electrical part	system connection plug, 180° movement, PG7 exchangeable magnetic heads AC/DC
Nominal diameter	1,2 mm
Ambient temperature	-10 °C to +60 °C
Housing	Brass
Internal parts	Stainless steel
Seals	FPM

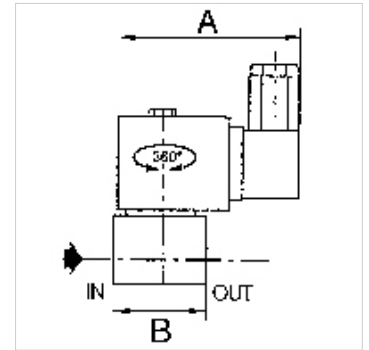

Note

Further information on request

Description

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

Item

Identification	Thread	Voltage	A (mm)	B (mm)
K- 07 30 22 50	G 1/8	230/50 V AC, 50 Hz	58,0	33,0
K- 07 30 22 51	G 1/8	24 V DC	58,0	33,0