


# K-BKR IG IG

Brass ball valves, female/female thread

**HANSA****FLEX**

## Properties

Working pressure	Max. 25 bar
Operating pressure	Max. 28 bar
Operating temperature	-20 °C to +100 °C
Thread description	G thread acc. DIN EN ISO 228-1
Housing	Nickel-plated brass
Lever	Steel Q235-A (1.0038) with blue PVC coating
Ball	Nickel-plated brass
Ball seals	PTFE
Stem seal	NBR

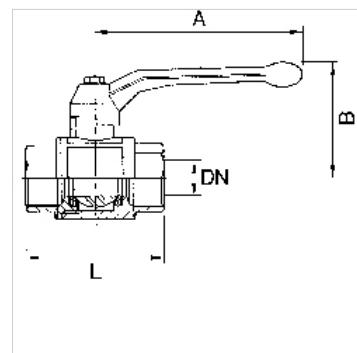

## Note

Further information on request

## Item

Identification	DN	Thread	A (mm)	B (mm)	L (mm)
K-07 30 21 61	8	1/4	75,0	38,0	40,0
K-07 30 21 62	10	3/8	75,0	38,0	40,0
K-07 30 21 63	15	1/2	96,0	45,0	50,0
K-07 30 21 64	19	3/4	98,0	45,0	55,0
K-07 30 21 65	25	1	118,0	55,0	63,0
K-07 30 21 66	31	1 1/4	118,0	58,0	73,0
K-07 30 21 67	37	1 1/2	138,0	73,0	83,0
K-07 30 21 68	45	2	160,0	82,0	99,0