

K-BKR MINI SERIE VALVE LINE

Mini ball valves

HANSA FLEX

Properties

Operating pressure Max. 10 bar



Media temperature -10 °C to +90 °C

Turning handle Plastic

Housing and ball Nickel-plated brass

Ball seals PTFE

Stem seal NBR

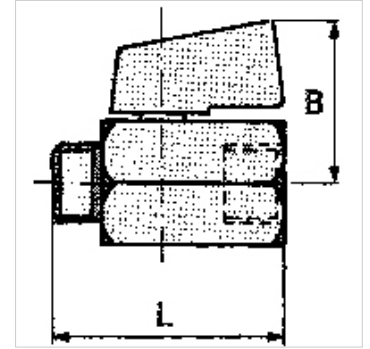

Item

Identification	DN	Thread	B (mm)	L (mm)	AF (mm)
K- 07 30 21 69	8	1/4 female	28,0	42,0	20
K- 07 30 21 70	8	3/8 female	28,0	42,0	20
K- 07 30 21 71	10	1/2 female	29,0	45,5	24
K- 07 30 21 72	8	1/4 female/male	28,0	40,5	20
K- 07 30 21 73	8	3/8 female/male	28,0	40,5	20
K- 07 30 21 74	10	1/2 female/male	29,0	44,5	24