


# K-MV G Z 24 V DC

Normally closed, combined operation, 24 V DC (direct current)

**HANSA FLEX**

## Properties

<b>Electrical connection</b>	For connector socket Pg 9/Pg 11, acc. to ISO 4400
<b>Protection IP</b>	IP65 (with connector socket fitted)
<b>Media temperature</b>	-10 °C to +90 °C (NBR); -10 °C bis +140 °C (FKM)
<b>Housing, valve seat</b>	Brass
<b>Internal parts</b>	Stainless steel
<b>Seal</b>	Perbunan (NBR) or FKM

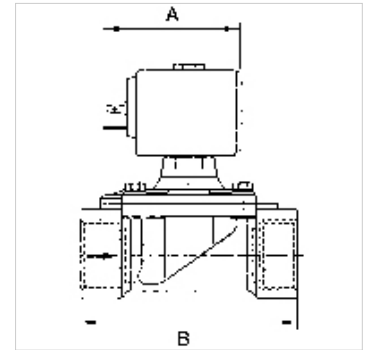

## Note

Further information on request

## Description

Economy series available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Item

Identification	Thread	Max. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
K- 07 30 23 55	G 3/8	14	11,0	NBR/PA	67,0	56,0	8
K- 07 30 23 56	G 1/2	14	16,0	NBR/PA	67,0	70,0	8
K- 07 30 23 57	G 3/4	14	16,0	NBR/PA	67,0	70,0	8
K- 07 30 23 58	G 1	6	25,0	NBR/PA	67,0	104,0	8