


K-MV G V 24 V DC

Normally closed, pilot-operated, 24 V DC (direct current)

HANSA FLEX

Properties

Electrical connection	ISO 4400. cable socket (Pg 11P)
Protection IP	IP65 (with connector socket fitted)
Media temperature	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Thread description	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR) or FKM

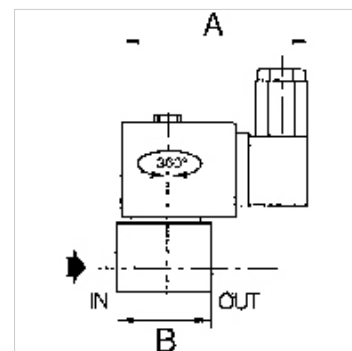

Note

Further information on request

Description

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item								
Identification	Thread	Max. working pressure (bar)	min. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
K- 07 30 23 24	Rp 3/8	9	0,35	16,0	NBR	80,0	70,0	3
K- 07 30 23 30	Rp 3/8	9	0,35	16,0	FKM	80,0	70,0	3
K- 07 30 23 91	Rp 1/2	9	0,35	16,0	NBR	80,0	70,0	3
K- 07 30 23 31	Rp 1/2	9	0,35	16,0	FKM	80,0	70,0	3
K- 07 30 23 25	Rp 3/4	7	0,35	19,0	NBR	80,0	71,0	3
K- 07 30 23 32	Rp 3/4	7	0,35	19,0	FKM	80,0	71,0	3
K- 07 30 23 26	Rp 1	9	0,35	25,0	NBR	80,0	95,0	4
K- 07 30 23 33	Rp 1	9	0,35	25,0	FKM	80,0	95,0	4
K- 07 30 23 27	Rp 1 1/4	9	0,35	28,0	NBR	80,0	95,0	4
K- 07 30 23 34	Rp 1 1/4	9	0,35	28,0	FKM	80,0	95,0	4
K- 07 30 23 28	Rp 1 1/2	9	0,35	32,0	NBR	80,0	111,0	5
K- 07 30 23 35	Rp 1 1/2	9	0,35	32,0	FKM	80,0	111,0	5
K- 07 30 23 29	Rp 2	3	0,35	44,0	NBR	80,0	129,0	5