


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

Properties

Electrical connection	ISO 4400. cable socket (Pg 11P)
Protection IP	IP65 (with connector socket fitted)
Media temperature	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Thread description	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR) or FKM

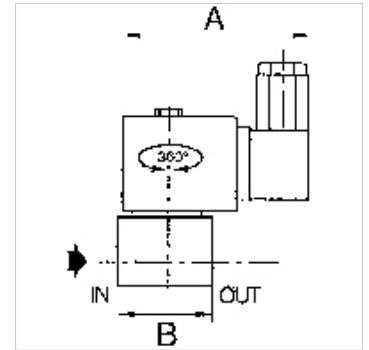

Note

Further information on request

Description

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item

Identification	Thread	Max. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3