


K-MV O Z 24 V DC

Normally open, combined operation, 24 V DC (direct current)

HANSA FLEX

Properties

Electrical connection	ISO 4400. cable socket (Pg 11P)
Protection IP	IP65 (with connector socket fitted)
Media temperature	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Thread description	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	Perbunan (NBR) or FKM

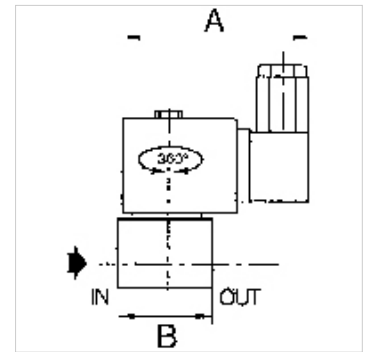

Note

Further information on request

Description

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item

Identification	Thread	Max. working pressure (bar)	DN	Sealant	A (mm)	B (mm)	Type
K- 07 30 24 00	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 24 01	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 24 02	Rp 3/4	9	19,0	NBR	80,0	70,0	3