

# K-RD SCHRAEGSITZ VA

Unidirectional valves

## Properties

| | |
|---|---|
| **Operating pressure** | Max. 40 bar |
| **Thread description** | G thread acc. DIN EN ISO 228-1 |
| **Media temperature** | max. +180 °C |
| **Opening pressure** | min. 0.2 bar |
| **Ambient temperature** | Max. +180 °C |
| **Housing, internal parts** | Stainless Steel 1.4401/1.4408 |
| **Sealant** | FKM |



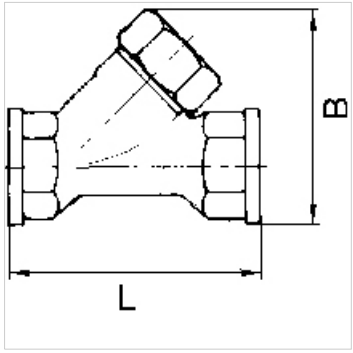


## Note

Further information on request

## Item

| Identification | Thread | B (mm) | L (mm) | AF (mm) |
|---|---|---|---|---|
| **K- 07 30 24 67** | G 1/4 | 53,5 | 66,0 | 27 |
| **K- 07 30 24 68** | G 3/8 | 53,5 | 66,0 | 27 |
| **K- 07 30 24 69** | G 1/2 | 53,5 | 66,0 | 27 |
| **K- 07 30 24 70** | G 3/4 | 68,0 | 76,0 | 32 |
| **K- 07 30 24 71** | G 1 | 82,0 | 90,0 | 40 |
| **K- 07 30 24 72** | G 1 1/4 | 97,0 | 110,0 | 50 |
| **K- 07 30 24 73** | G 1 1/2 | 113,0 | 121,0 | 55 |
| **K- 07 30 24 74** | G 2 | 131,0 | 151,0 | 70 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*