


K-RD SCHRAEGSITZ VA

Unidirectional valves

HANSA FLEX

Properties

| | |
|--------------------------------|--------------------------------|
| Operating pressure | Max. 40 bar |
| Thread description | G thread acc. DIN EN ISO 228-1 |
| Media temperature | max. +180 °C |
| Opening pressure | min. 0.2 bar |
| Ambient temperature | Max. +180 °C |
| Housing, internal parts | Stainless Steel 1.4401/1.4408 |
| Sealant | FKM |

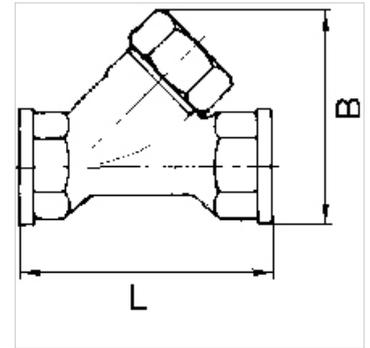

Note

Further information on request

Item

| Identification | Thread | B (mm) | L (mm) | AF (mm) |
|----------------|---------|-----------|-----------|------------|
| K- 07 30 24 67 | G 1/4 | 53,5 | 66,0 | 27 |
| K- 07 30 24 68 | G 3/8 | 53,5 | 66,0 | 27 |
| K- 07 30 24 69 | G 1/2 | 53,5 | 66,0 | 27 |
| K- 07 30 24 70 | G 3/4 | 68,0 | 76,0 | 32 |
| K- 07 30 24 71 | G 1 | 82,0 | 90,0 | 40 |
| K- 07 30 24 72 | G 1 1/4 | 97,0 | 110,0 | 50 |
| K- 07 30 24 73 | G 1 1/2 | 113,0 | 121,0 | 55 |
| K- 07 30 24 74 | G 2 | 131,0 | 151,0 | 70 |