K-RD SCHRAEGSITZ MS


Unidirectional valves

HANSA-FLEX

Properties

Operating pressure	Max. 10 bar
Thread description	Rp thread acc. to DIN 2999
Media temperature	max. +80 °C
Opening pressure	min. 0.5 bar
Ambient temperature	Max. +80 °C
Sealant	NBR
Housing	Brass



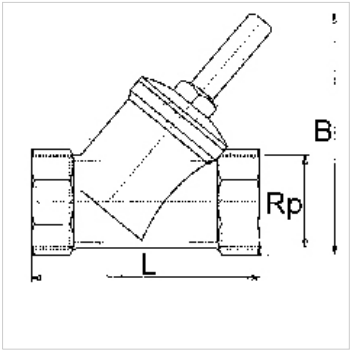

Note

Further information on request

Item

Identification	Thread	B (mm)	L (mm)	AF (mm)
K- 07 30 24 75	Rp 3/8	50,0	55,0	27
K- 07 30 24 76	Rp 1/2	50,0	59,0	27
K- 07 30 24 77	Rp 3/4	60,0	67,0	32
K- 07 30 24 78	Rp 1	71,0	83,0	38
K- 07 30 24 79	Rp 1 1/4	97,0	96,0	48
K- 07 30 24 80	Rp 1 1/2	114,0	106,0	54
K- 07 30 24 81	Rp 2	135,0	130,0	68

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.