
K-RD VOLLER DURCHGANG

Non-return valves

Properties

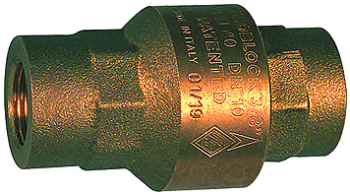

Operating temperature	-10 °C to +100 °C
Opening pressure	20 mbar
Sealant	NBR
Spring	Stainless-steel
Housing	Brass
Slider	Polyether imide (PEI)

Note

Further information on request

Description

Economy non-return valves with full passage and very low opening pressure.

Item

Identification	Thread	Length (mm)	Max. working pressure (bar)	AF (mm)
K- 07 30 24 53	Rp 3/8	47,0	40	20
K- 07 30 24 54	Rp 1/2	59,0	40	25
K- 07 30 24 55	Rp 3/4	65,0	40	31
K- 07 30 24 56	Rp 1	75,0	25	38
K- 07 30 24 57	Rp 1 1/4	83,0	25	48
K- 07 30 24 58	Rp 1 1/2	89,0	16	54
K- 07 30 24 59	Rp 2	101,0	16	67

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.