
# K-SCHMUTZFAENGER VA

Strainers

## Properties

| | |
|---|---|
| **Operating pressure** | Max. 40 bar |
| **Operating temperature** | max. 180 °C |
| **Thread description** | G thread acc. to ISO 228-1 |
| **Media temperature** | max. 180 °C |
| **Screen** | Stainless steel, mesh size 0.6 mm |
| **Housing and head piece** | stainless steel 1.4401/1.4408 |

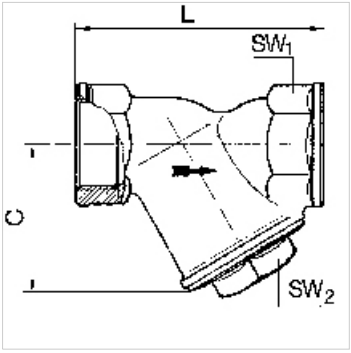


## Note

Further information on request

## Item

| Identification | DN | Thread | C (mm) | L (mm) | AF1 (mm) | AF2 (mm) |
|---|---|---|---|---|---|---|
| **K- 07 30 25 00** | 8 | G 1/4 | 47,0 | 65,0 | 26 | 19 |
| **K- 07 30 25 01** | 10 | G 3/8 | 47,0 | 65,0 | 26 | 19 |
| **K- 07 30 25 02** | 15 | G 1/2 | 47,0 | 65,0 | 26 | 19 |
| **K- 07 30 25 03** | 20 | G 3/4 | 60,0 | 80,0 | 32 | 21 |
| **K- 07 30 25 04** | 25 | G 1 | 71,0 | 90,0 | 41 | 27 |
| **K- 07 30 25 05** | 32 | G 1 1/4 | 77,0 | 105,0 | 49 | 28 |
| **K- 07 30 25 06** | 40 | G 1 1/2 | 87,0 | 120,0 | 56 | 32 |
| **K- 07 30 25 07** | 50 | G 2 | 103,0 | 140,0 | 69 | 41 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*