


K-SCHMUTZFAENGER VA

Strainers

Properties

| | |
|------------------------|-----------------------------------|
| Operating pressure | Max. 40 bar |
| Operating temperature | max. 180 °C |
| Thread description | G thread acc. to ISO 228-1 |
| Media temperature | max. 180 °C |
| Screen | Stainless steel, mesh size 0.6 mm |
| Housing and head piece | stainless steel 1.4401/1.4408 |

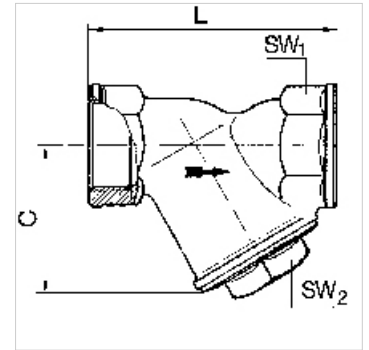

Note

Further information on request

Item

| Identification | DN | Thread | C (mm) | L (mm) | AF1 (mm) | AF2 (mm) |
|----------------|----|---------|-----------|-----------|-------------|-------------|
| K- 07 30 25 00 | 8 | G 1/4 | 47,0 | 65,0 | 26 | 19 |
| K- 07 30 25 01 | 10 | G 3/8 | 47,0 | 65,0 | 26 | 19 |
| K- 07 30 25 02 | 15 | G 1/2 | 47,0 | 65,0 | 26 | 19 |
| K- 07 30 25 03 | 20 | G 3/4 | 60,0 | 80,0 | 32 | 21 |
| K- 07 30 25 04 | 25 | G 1 | 71,0 | 90,0 | 41 | 27 |
| K- 07 30 25 05 | 32 | G 1 1/4 | 77,0 | 105,0 | 49 | 28 |
| K- 07 30 25 06 | 40 | G 1 1/2 | 87,0 | 120,0 | 56 | 32 |
| K- 07 30 25 07 | 50 | G 2 | 103,0 | 140,0 | 69 | 41 |