



K-SPV DOPPEL

Check valves, double-acting

HANSA FLEX

Properties

| | |
|--------------------------------|---|
| Operating pressure | Max. 10 bar |
| Pilot pressure | min. 3.0 bar, max. 8 bar with double-acting actuator; min. 4.2 bar, max. 8 bar for single-drive |
| Temperature | -20 °C to +80 °C (NBR); -20 °C to +150 °C (FKM) |
| Connection | NAMUR-Interface, direct: 2 x G 1/8 |
| Installation position | Any |
| Housing, internal parts | Nickel-plated brass |
| Spring | Stainless-steel |
| Sealant | Perbunan (NBR) or FKM (FPM) |

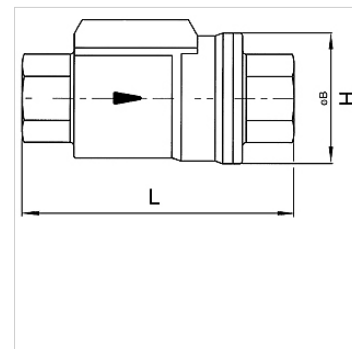

Note

Further information on request

Description

2/2-way check valves, specially designed for automated industrial plant engineering. A low-price, compact, space-saving and reliable alternative to ball valves with a pneumatic rotary actuator.
These valves have a full bore.

| Item | | | | | |
|----------------|----|--------|---------|-----------|-----------|
| Identification | DN | Thread | Sealant | H (mm) | L (mm) |
| K- 07 30 25 37 | 10 | Rp 3/8 | NBR | 46,0 | 98,0 |
| K- 07 30 25 38 | 15 | Rp 1/2 | NBR | 51,7 | 112,0 |
| K- 07 30 25 39 | 20 | Rp 3/4 | NBR | 63,5 | 135,0 |
| K- 07 30 25 40 | 25 | Rp 1 | NBR | 69,0 | 143,0 |
| K- 07 30 25 41 | 10 | Rp 3/8 | FKM | 46,0 | 98,0 |
| K- 07 30 25 42 | 15 | Rp 1/2 | FKM | 51,7 | 112,0 |
| K- 07 30 25 43 | 20 | Rp 3/4 | FKM | 63,5 | 135,0 |
| K- 07 30 25 44 | 25 | Rp 1 | FKM | 69,0 | 143,0 |